


## Double Sprinklers

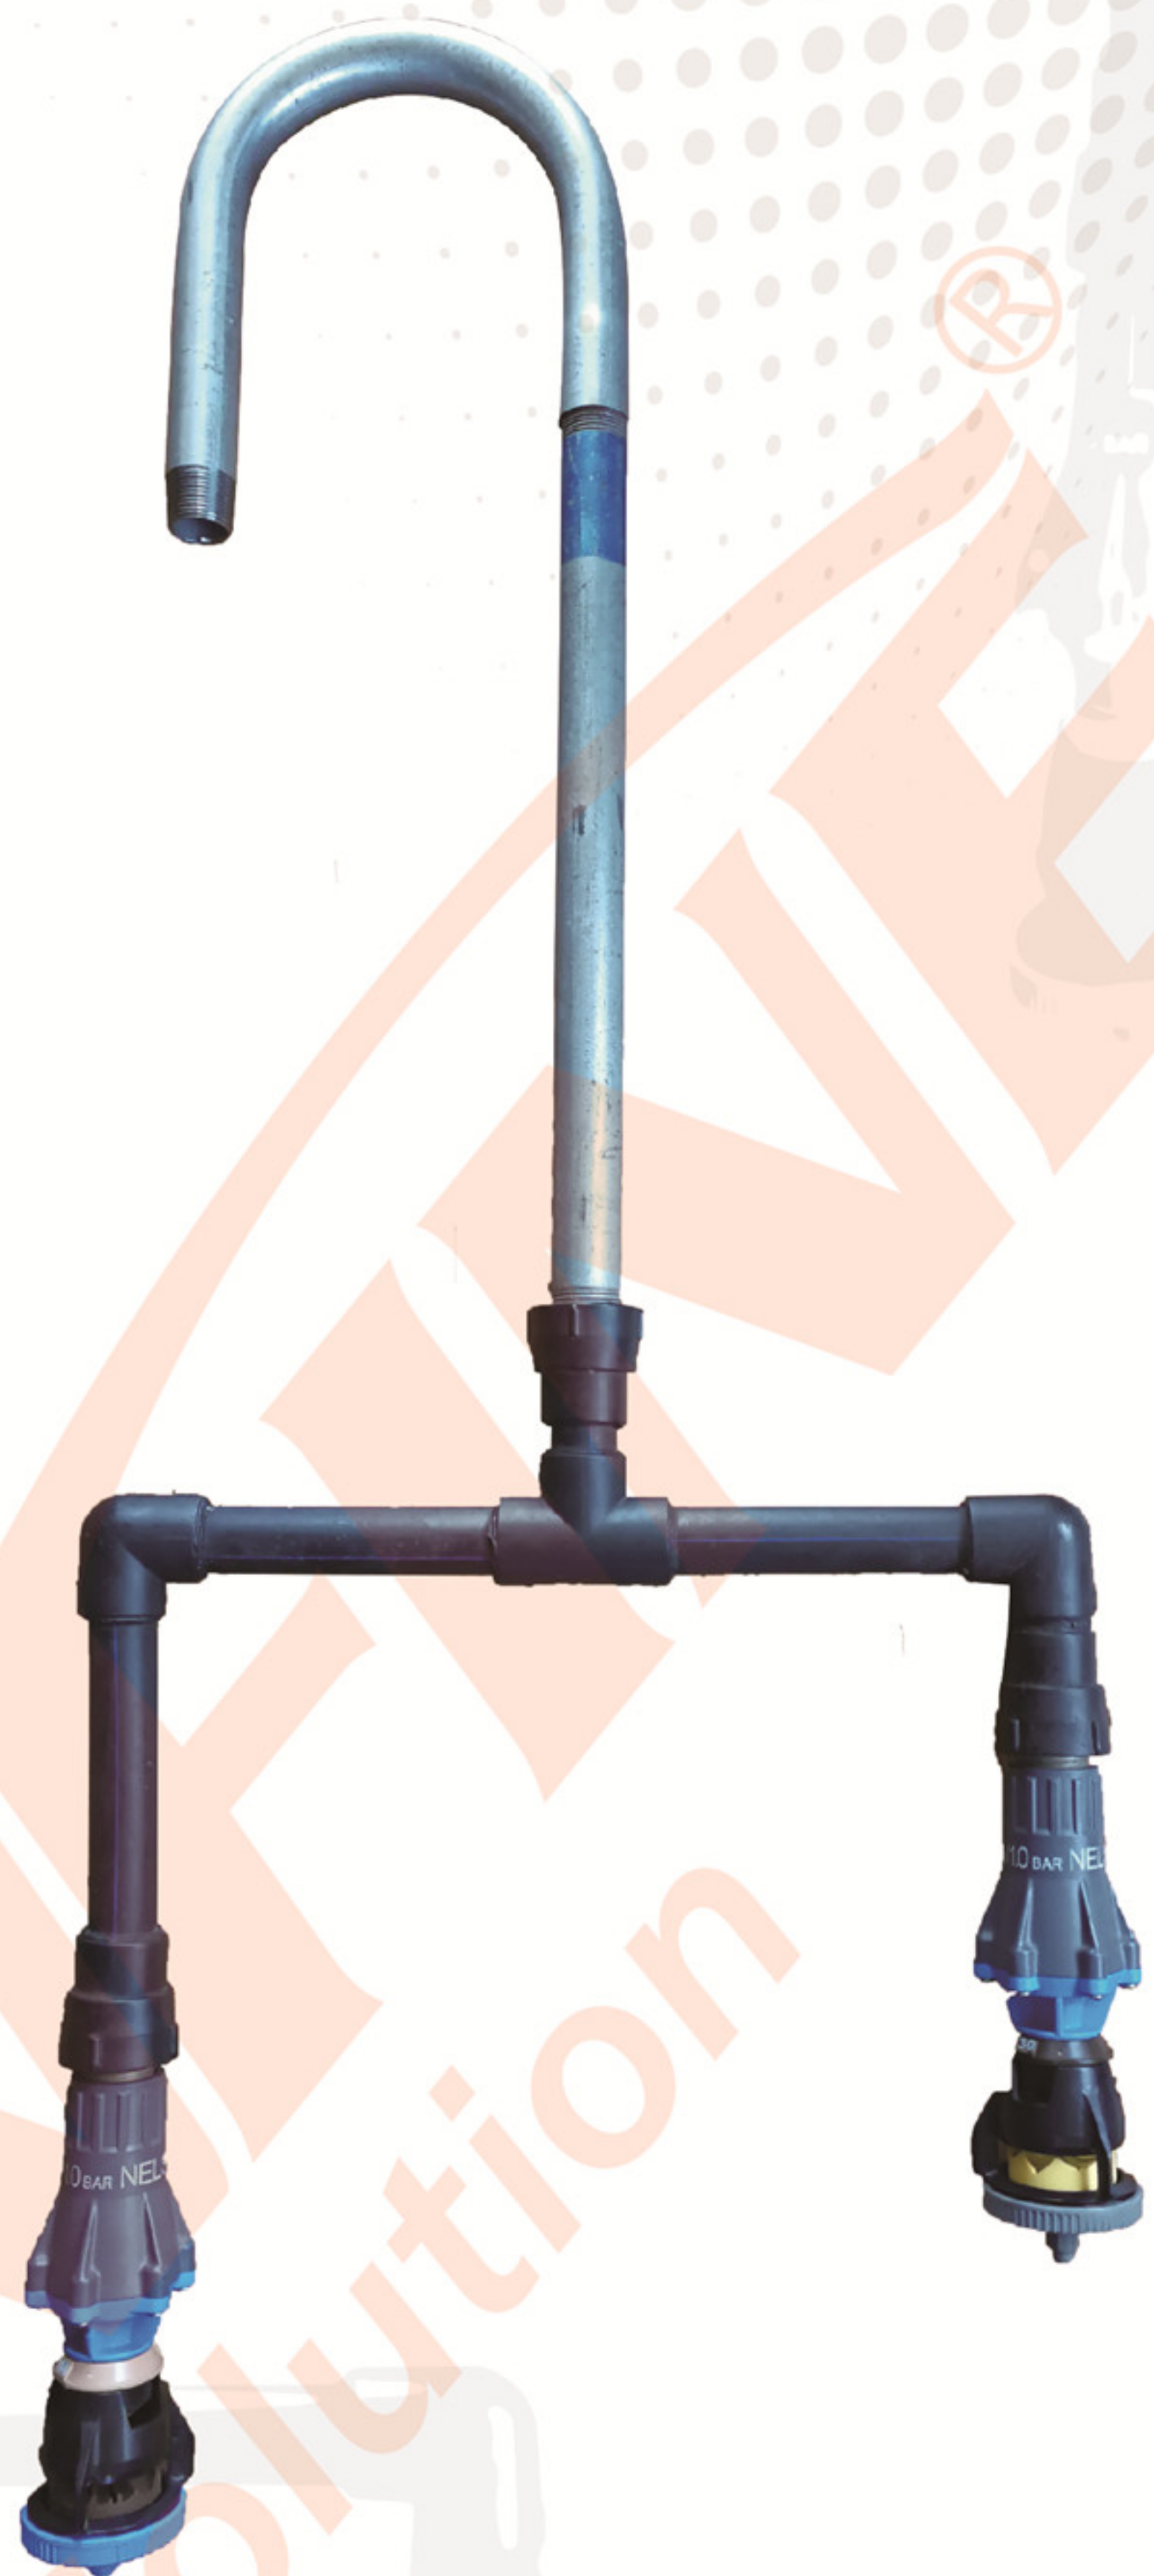

- Double sprinklers are usually used on the outside circle of pivot spans to increase the water application.
- Steel drop should be used instead of flexible hose to fight against the vibration caused by double sprinklers.
- Double sprinkler should be installed in different heights in case the water sprays may drop down at two levels.
- T frame is made from PE pipe  
All joints and threads are made of aluminum which can be free from corrosion.